

# CREATION, IMPLEMENTATION AND EVALUATION OF AN INDOOR NAVIGATION SYSTEM FOR USERS WITH DISABILITIES

Y. M. Montilla<sup>1</sup>\*, C. León-Sánchez<sup>2</sup>, I. Lizarazo Salcedo<sup>3</sup>

<sup>1</sup> National University of Colombia - ymontilla@unal.edu.co

<sup>2</sup> 3D Geoinformation group, Delft University of Technology, Faculty of Architecture and the Built Environment, the Netherlands - c.a.leonsanchez@tudelft.nl

<sup>3</sup> Spatial Analysis of the Territory and Global Change (AET-CG) Research Group. National University of Colombia Bogotá, Colombia - ializarazos@unal.edu.co

## Commission IV, WG IV/9

**KEY WORDS:** 3D Indoor Navigation, Indoor Positioning, Visually Impaired, 3D Modeling, IndoorGML, CityGML, BLE, RSSI, WPL

### ABSTRACT:

Indoor navigation is a complex task for people and especially for visually impaired ones. This research proposes an indoor navigation system oriented to visually impaired users, integrating the OGC IndoorGML and CityGML standards with Bluetooth Low Energy devices (BLE) by using the RSSI signal loss value and the Weighted Path Loss - techniques to calculate the user's location. This paper describes the design of the system and its implementation as a functional prototype in a mobile web application. Several operational tests were conducted to determine both the accuracy and precision of the user location. The user's positioning results show a root-mean-squared error (RMSE) of 0.88 m in a scenario with obstacles and no height difference of the BLE devices location, and a RMSE of 1.06 m in a scenario with obstacles and height difference. These results confirm the potential of the implemented prototype to grow into a fully operational system.

## 1. INTRODUCTION

Navigation is a basic action in people's daily lives (Timpf et al., 1992), which allows the recognition of indoor and outdoor spaces (Yan et al., 2019). Indoor navigation is becoming more complex due to the increasing size of buildings (Alattas et al., 2017) and their elements such as stairs, doors and elevators (Li, 2008, Kontarinis et al., 2019). The challenge increases for people with disabilities (Park et al., 2020) because they rarely have access to maps, signs, or other orientation devices (Coret Gorgonio et al., 2015). Visually impaired people usually require assistance and orientation to reach unfamiliar destination indoor spaces (Alattas et al., 2017).

Nowadays, the availability of new technologies has sparked a great deal of interest on indoor navigation systems (Zafari et al., 2019, Simões et al., 2020). As a result, geographic information systems are no longer limited to manage outdoor space, but also indoor spaces (Li, 2008). This emerging trend has generated multiple proposals for indoor navigation, which incorporate different representation models, technologies and positioning techniques (Simões et al., 2020). Many proposals focus on the use of communication technologies such as Wi-Fi, Bluetooth, RFID, (Coret Gorgonio et al., 2015), in order to overcome Global Navigation Satellite Systems (GNSS) inefficiency in enclosed spaces due to signal attenuation and losses (Pérez-Navarro et al., 2018, Simões et al., 2020).

Several standards can encompass the representation of interior spaces from a geometric approach, such as OGC's CityGML and KML 2.0 and ISO 16739-1:2018 IFC (Industry Foundation Classes). However, these standards lack semantic features required for navigation purposes in an indoor space (Kim et al.,

2014). IFC and CityGML are semantically poor because they do not implement explicitly topological relations as neighborhoods between spaces (Isikdag et al., 2013). In contrast, the OGC IndoorGML standard is designed to materialize the semantic representation of indoor spaces to support indoor navigation systems (OGC, 2014). The differences between the mentioned standards are basically because each standard is created for a different purpose (Wong and Lee, 2019); nevertheless, IndoorGML models can be derived from CityGML models in LoD4 or IFC (Kim et al., 2014).

In this paper, we propose an indoor navigation system aimed at facilitating the mobility of visually impaired users. We describe the process to integrate the CityGML and IndoorGML standards with BLE technology and specify the technical characteristics of the system's components. Integrating the standards is essential to replicate the proposed approach, to have a geometric representation of the space, to provide context information, and to enable a topological and semantic component. Then, we propose the use of BLE devices to determine the user location in real time. This approach allowed us to implement and test a prototype which provides a balanced solution between cost and positional accuracy.

## 2. DATA AND METHODS

### 2.1 Study Area

The navigation system is implemented for the Birmania building, at the municipality of Fusagasugá, department of Cundinamarca, in the Andean region of Colombia. It is a four-story residential building with an approximate usable area of 202.5 m<sup>2</sup> in total. The building contains four dwellings, one per floor.

\* Corresponding author

## 2.2 Analysis of user requirements

User requirements for the indoor navigation system is conducted according to well-established criteria suggested by several authors (Afyouni et al., 2012, Simões et al., 2020, Miao et al., 2011). Based on the literature review, generic requirements of an indoor navigation system and specific requirements for addressing needs of visually impaired users were established. The specification is organized around the following three criteria: **Generic service criteria:**

- **Localization:** The system should provide a location with respect to a coordinate system (Afyouni et al., 2012), with accuracy and timeliness (Wirola et al., 2010, Simões et al., 2020), The accuracy refers to both vertical and horizontal coordinates (Wirola et al., 2010). The quality of localization should balance location accuracy and speed of response (Simões et al., 2020).
- **Navigation:** The route should be planned according to user’s capabilities and preferences, and should track the route followed by the user to provide relevant information for guidance and de-tour notifications (Afyouni et al., 2012).
- **Visualization:** Provide visual information to users of their position (Simões et al., 2020) as well as to their surroundings and to context information (Afyouni et al., 2012).

### Generic efficiency criteria:

- **Modeling effort:** It should focus on the building and it should be updated according to the current situation of the interior space (Afyouni et al., 2012).
- **Flexibility:** Possibility of expanding the system to navigate a larger space and incorporate other types of sensors and technologies (Afyouni et al., 2012).
- **Efficiency:** Speed of response to user requests (Afyouni et al., 2012).
- **Scalability:** Ease of scaling up to a larger system (Simões et al., 2020), while maintaining its capacity (Afyouni et al., 2012).
- **Others:** Low implementation cost (Simões et al., 2020).

### Specific requirements for supporting visually impaired people:

- **Localization:** It must be provided with high spatial accuracy (Martinez-Sala et al., 2015), and in real time (Nakajima and Haruyama, 2013).
- **Navigation:** The planned route should address the user’s particular preferences and needs (Miao et al., 2011), and provide contextual information that allows them to be aware of eventual obstacles along the way (Simões et al., 2020, Miao et al., 2011, Nakajima and Haruyama, 2013). Other relevant navigation data should include direction of travel and distance to the destination (Nakajima and Haruyama, 2013).
- **Application:** It should be simple to use and include commands easy to memorize, preferably with voice commands. It should include both a mobile and a desktop version for planning routes in advance and options to select preferences for route calculation and directions in terms of right, back, left and distance in meters (Miao et al., 2011).

- **Data model:** It should include attributes on critical spaces for navigation of impaired people, for example, space width, slope, changes in elevation, eventual voids or promontories on the floor; type and opening direction of doors and doorlocks; location of handrails, elevators, wheelchair elevator and ramps (Park et al., 2020).

## 2.3 System architecture

The architecture defines the system components and how they interact with each other (ISO, 2011). We propose four components: 1) A network of BLE sensors in the building broadcast their RSSI signal. 2) A database that provides the semantic and topological information of the building; it stores part of the model, containing the topological information that provides the navigation network for routing ; it also stores the CityGML model that provides the context information of the space and provides the known information of the sensors (location, name, identification). 3) A web service, to allow the communication between the application and the database. 4) A mobile application, to provide a graphical user interface (GUI) to interact with the user, allowing the visualization of the 3D model of the building.

## 2.4 Construction of a 3D representation model

As the building lacked a digital or analogue architectural plan, it is necessary to create it from scratch and then to store the corresponding data in a database. This architectural data includes only those elements required to generate the CityGML v2.0 model at level of detail 4 (LoD4). We use the satellite image provided by the Bing Maps service to assign the geographic coordinates of the building. Once the structuring of the data is completed, the following layers were obtained: room, Muro\_R, Muro\_L, door, window, staircase, floor, ceiling, plate and roof. The Muro\_L layer includes all the vertical elements needed to have an accurate representation of indoor spaces in the building, including walls and columns. To facilitate the construction of the CityGML model, the attributes described in the table 1 were assigned to each layer. Likewise, the attributes of interest for people with disabilities were assigned to the room (Table 2) and door (Table 3) layers.

Attribute	Description
ID	unique object identifier
ParentID	Parent object identifier following CityGML structure
Name	Name of the space
No. Floor	Storey above the ground where the object is located
Height	Architectural height of the object
AlturaZ	Altitude above sea level of the object
Type	indicates if the object is external or internal
Function	Type of navigation in the spaces: transitional or general (applies only to the room layer)
Color	Color of the object to assign the appearance
Inclination	Defines whether the object is a tilted or non-tilted

Table 1. General attributes

The development of the CityGML and IndoorGML models is carried out following the steps proposed by (Montilla and León-Sánchez, 2020).

We created the LoD4 CityGML v2.0 file from the architectural plan database using FME, the gml\_description attribute, which stores all the physical characteristics of the space. We also used

Attribute	Description
Transit_Type	Indicates whether the space corresponds to a room, stairs, hallway, etc.
Width	Width of the space if it has a transit function
Slope	Slope of the space.
Caract_Steps	If the space corresponds to stairs, indicate the number of steps and the average height.
Caract_Stairs	If the space corresponds to stairs, indicate the characteristics of the stairs, the presence of handrails, stair lifts, etc.

Table 2. Attributes in room layer

Attribute	Description
Type_Door	indicates whether the door is hinged, folding or electronic, additionally specifies the material
Width	Width of the door
Height	Height of the door
Door_opening	Defines the type of door opening, e.g. Left Inside

Table 3. Attributes in Door layer

FME to create the IndoorGML file derived from the CityGML model. To obtain the connections between spaces we used a topological analysis and from this we constructed the Node Relationship Graph (NRG) using the Poincaré duality. This process outputs the class *State*, a node of each space and the class *Transition*, which establishes the connection between nodes.

Objects *room* and *door* from the CityGML model and the classes *state* and *transition* from the IndoorGML model are migrated to the database. CityGML objects are essential to provide the reference information of the location space, while the IndoorGML model classes provide the navigational network elements for routing. The migration of the CityGML and IndoorGML classes to the PostgreSQL database is performed using a workflow in FME; before performing the upload, the attributes were adjusted so that the tables created were compatible with the Dijkstra shortest path search algorithm (Dijkstra, 1959) available in pgRouting.

## 2.5 Indoor positioning

We use E2 Max Beacons produced by the company Minew for indoor location services and commercial advertising (Minew, 2021). The devices were configured to issue their UID using the Eddystone protocol and with the following parameters: broadcasting interval (*Adv interval*) 100 milliseconds; power level (*Radio Txpower*) of 0 dBm, which allows a signal range of approximately 90 meters depending on the physical environment; the RSSI reference value (*RSSI@0m*) is a pre-calibrated value indicating what the RSSI value should be at the 0m distance, in this case -24dBm. The configuration is performed with the BeaconSET+ application suggested by the manufacturer (Minew, 2021).

In order to test the accuracy of the indoor positioning methodology, the devices were installed following three scenarios. In the first one, the four devices were placed at the same height in a space without obstacles; therefore, there is a direct visual between the mobile device and the BLE devices. In the second one, the four devices were placed at the same height in a space with obstacles between them such as walls and doors; the devices had no visual between them. In the last one, the devices were installed at different heights with obstacles between them;

there is no direct visual between the devices. It is important to point out that since there were only four BLE devices, it is not possible to have coverage of the entire building, so the devices were relocated according to the different scenarios at several rooms.

The information of the device location points is stored in the database. The table is composed of the following attributes: *id*, the point identifier; *UID*, MAC address of the BLE device; and the *geom*, point geometry ( $x, y, z$ ) of the device location location in the building according to the scenarios proposed. Each time the scenario is changed, the location of the devices in the database is updated.

Device detection is performed using the *cordova-plugin-ble-central* add-on, which enables communication between the smartphone and the BLE device (Coleman, 2014). The distance is calculated considering the signal loss model given by the equation 1 (Huh and Seo, 2017).

$$RSSI = -10n \log_{10}(d) + A \quad (1)$$

where  $d$  = Distance between the BLE and the mobile  
 $A$  = Reference RSSI value at one meter distance  
 $n$  = Signal propagation exponent

The reference RSSI value  $A$  corresponds to the median of 1000 measurements of the RSSI value at a distance of one meter. From the measurements made of the RSSI value at different distances in each scenario, the parameter  $n$  is calculated using the nonlinear least squares, Trust-region fit. Having the values of  $A$  and  $n$  it is possible to calculate the distance  $d$  by the equation 2 obtained from the equation 1.

$$d = 10^{-\frac{RSSI-A}{10n}} \quad (2)$$

The positioning technique used is based on the *Weighted Path Loss - WPL* algorithm proposed by (Zou et al., 2013a) and used in WiFi and RFID based systems. The system detected the RSSI signal from the sensors, in this case four (4) BLE devices, and calculate the distance between them and the mobile device. The distances  $d$  assigned to each device  $N$  at a time step  $t$  are expressed as a vector  $\{d_t^1, d_t^2, d_t^N\}$ , from which a weight is assigned to each device using the equation 3.

$$w_t^i = \frac{\frac{1}{d_t^i}}{\sum_{i=1}^N \frac{1}{d_t^i}} \quad (3)$$

Thereafter, the location of the mobile,  $(x, y, z)$ , is calculated with the equation 4:

$$(x, y, z) = \sum_{i=1}^N w_t^i (x_i, y_i, z_i) \quad (4)$$

where  $(x_i, y_i, z_i)$  = Location of each BLE device

## 2.6 Interior Navigation System

On the Amazon Web Services (AWS) cloud computing platform an EC2 instance is created with Ubuntu 18.04 (Amazon Web Services, Inc., 2022), where the web server and database were configured. The web service is composed of a PostREST web server, which focuses exclusively on database mapping, so a reverse proxy is required to bring the system into production. The reverse proxy is configured on NGINX, a free and open web server for HTTP, TCP and UDP traffic (Nginx, 2021). The SSL certificate is generated using the OpenSSL library. PostgreSQL is mounted in a Docker container using a Postgres 11 image, PostGIS 2.5 and pgRouting 2.6.3. Once PostgreSQL is installed, a schema for the application named *api* is created in the database. The required tables of the CityGML and IndoorGML model and the table with the sensor information, mentioned above, were created within this schema. Additionally, the following functions were created to manage the queries:

- A function to provide information from the network of sensors belonging to the navigation system.
- A function to query the optimal path from a initial space to a destination space within the building. This has as parameters the corresponding name of both spaces. The computation of the route is performed using Dijkstra's algorithm.
- A function provides the context information of the user's location. It receives the coordinates  $(x, y, z)$  corresponding to the user's location and selects which space contains it which can be a door or a room.
- A function to provide the geometry to display the start and end points of the path in the application. is named space returns the geometry of the class *state*.
- A function to provide the geometry to display the estimated location point of the user. The function receives the coordinates  $(x, y, z)$  in EPSG:3857 and converts them to the EPSG:4326 coordinate system.

The indoor navigation system application is functional prototype developed for a mobile environment which allowed testing the generic functionalities of the system. It is created in the open source Apache Cordova development environment which is used to create cross-platform applications through a combination of standard (HTML5, CSS3 and JavaScript) and native web application technologies. HTML cannot access the native components of the mobile device, therefore, plugins were installed to be able to access them (The Apache Software Foundation, 2016).

The graphical user interface is created with a simple design, with high contrast colors that allow easy differentiation between functionalities, facilitating its use for people with reduced visual capacity and users in general. The 3D visualization is created using CesiumJS (Cesium GS, Inc, 2022b), version 1.80 released on April 1, 2021. The CityGML model is deployed using the Cesium ion platform (Cesium GS, Inc, 2022a). This platform makes the data available online and makes use of tessellations providing a high performance. In addition, the *3D Tiles* format allows a faster deployment of the model and it does not lose geometric and semantic information (Buyukdemircioglu and Kocaman, 2020). Users press the location button and the location space is highlighted on the screen, the result is accompanied by audios to provide contextual information of the user's location, which is beneficial for visually impaired users.

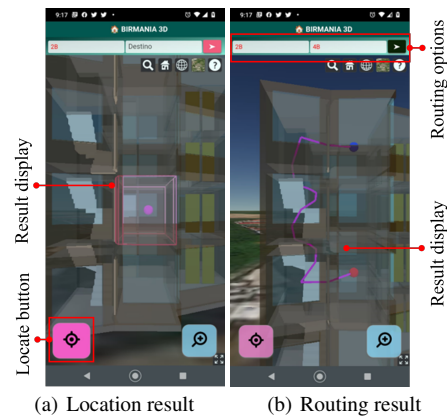


Figure 1. Indoor navigation system application

To search for the route, a text box must be used to enter the origin and destination spaces, an aspect that should be improved to facilitate the use by visually impaired users. Figure 1 shows the user interface of the application with the different functionalities to which the user has access.

The data used, the workflows and source code of the application is available on the GitHub link: <https://github.com/ymontilla/IndoorNavigationSystem>

## 3. RESULTS

### 3.1 Models of representation

Figure 2 shows the result result of the CityGML model of the building. The appearance is limited to the assignment of similar colors and textures or other shapes were omitted to produce a realistic appearance. For example, on the facade only a similar color is assigned to the bricks.


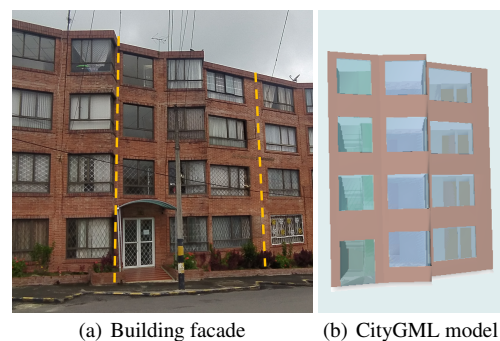


Figure 2. Reality vs. CityGML Model

Figure 3 shows the IndoorGML model derived from the CityGML model. The different spaces with their respective nodes and the transition class that connects the spaces horizontally and vertically can be observed. It is important to highlight that this model is automatically derived from the CityGML model by applying the FME workbench. The state and transition classes of the IndoorGML model constitute the navigation network and are therefore essential for routing queries.


### 3.2 Indoor positioning

The first step determines the parameters of the equation to calculate the distance, assuming the logarithmic decrease of the

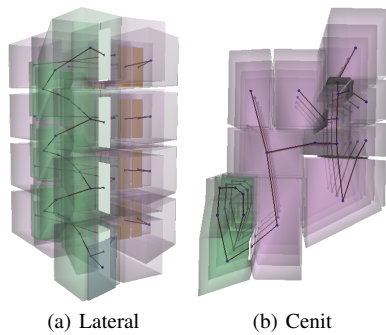

**Figure 3.** IndoorGML model of the Birmania building


signal strength as the distance increases. The parameter  $A$  is taken as the median of the RSSI values at a distance of 1m. The parameter  $n$  is determined by nonlinear least squares, Trust-region fitting. For each scenario, different reference points were stipulated at a given distance from the location of the BLE devices, as shown in the figure 4, taking 1000 readings for each point. The device involved in the experiments is the moto g(8) plus smartphone with Android 10. To perform the measurements an Android application is developed, considering the same parameters with which the indoor navigation system application works.

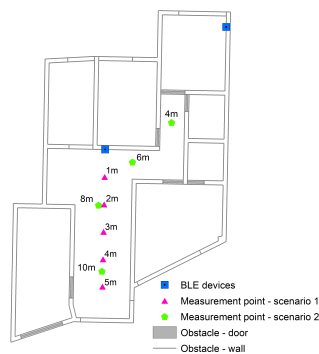


**Figure 4.** Measuring points for defining parameters  $A$  and  $n$

In the first scenario, with direct visual between the BLE devices and the smartphone, the RSSI value was read at a distance of 1m, 2m, 3m, 4m and 5m. According to these measurements the parameter  $A$  is set at  $-56$  RSSI and the parameter  $n$  is determined at 1.4. According to the literature this value corresponds to a free space (Naghdi and O’Keefe, 2019), it is assumed that the obtained value responds to the fact that the measurement is performed without any obstacle present. Figure 5 shows the RSSI measurements at each reference point, in red the RSSI value measurements and in blue the theoretical values calculated using the distance equation and the parameters  $A$  and  $n$  defined above.

For the second and third scenarios, with obstacles such as walls and door between the BLE devices and the smartphone, the RSSI value is read at a distance of 4m, 6m, 8m and 10m, which allowed setting  $n$  at 3.0. This value increased with respect to scenario one due to the presence of obstacles in this scenario. Figure 6 shows in red the RSSI value measurements and in blue the theoretical values calculated using the distance equation. It shows that as the distance increases, the signal loss value increases, reflected in the RSSI value.

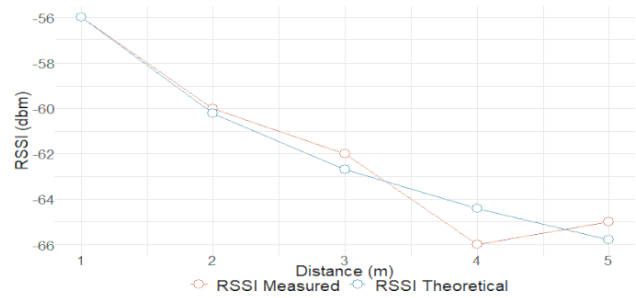

**Figure 5.** RSSI signal behavior in an unobstructed scenario

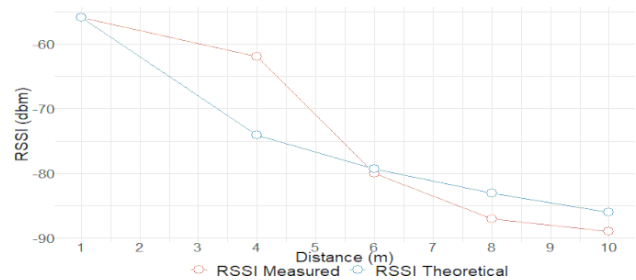

**Figure 6.** RSSI signal behavior in an obstacle scenario

To determine the precision and accuracy of the location calculation, reference points, considered as actual locations, were compared with estimates of the location of each point. The reference points were drawn on the building plan, then the corresponding coordinates  $(x, y, z)$  were extracted using ArcGIS (Esri, 2022). Subsequently, the points were measured and marked on the floor of the respective space, taking measurements from the walls. To perform the measurements, the mobile device is placed over each mark at a height of approximately 1.10 m. In each scenario, 30 measurements were taken for each reference point, then different comparisons were made to determine their precision and accuracy; in this process the differences in each dimension  $(x, y, z)$  and the distance differences were considered. The precision of the estimated locations is determined by the standard deviation ( $s$ ) and the coefficient of variation ( $CV$ ). The maximum error ( $e_{max}$ ) and the RMSE were used as criteria to analyze the accuracy the latter is calculated by the equation 5 (Yang et al., 2020).

$$RMSE = \sqrt{\frac{\sum_{i=1}^N [(\hat{x}_i - x_i)^2 + (\hat{y}_i - y_i)^2 + (\hat{z}_i - z_i)^2]}{N}} \quad (5)$$

where  $(\hat{x}_i, \hat{y}_i, \hat{z}_i)$  = Estimated coordinates of the point.  
 $(x_i, y_i, z_i)$  = True point coordinates  
 $N$  = Total number of measurements


The results of the test to determine the location are summarized in table 4. Accuracy values lower than at 1m were achieved in all three scenarios, however, in a few cases, 2m error were measured as in the case of scenario one, which indicates a high variability of the data, a statement that is confirmed by the coefficient of variation.

	Scenarios		
	One	Two	Three
$e_{max}$	2.13 m	1.81 m	1.99 m
$e_{min}$	0.06 m	0.14 m	0.33 m
$\bar{x}$	0.86 m	0.77 m	0.99 m
$s$	0.56 m	0.42 m	0.38 m
$CV$	0.65	0.54	0.39
$RMSE$	1.02 m	0.88 m	1.06 m


**Table 4.** Accurate and precise location results

The results do not show a significant difference in accuracy between a space with or without obstacles between the devices; therefore, it can be suggested that in terms of costs a system where only one BLE device per space is located is more viable. The results of scenario three indicate that the height can also be calculated from the WPL technique; however, it is important to determine how much the result is affected by the location of the BLE sensors.


On the other hand, the number of hits (correct positioning) of the location space is also evaluated. In scenario one (figure 7) all estimates hit the location space. In scenario two (figure 8) all the estimates made for points 1 and 3 got the location spaces completely right, while at point 2, located in the corridor, only 33% got the location space correctly. In scenario three (figure 9), 37% of the estimates were correct with location sub-spaces in the stairs. The results suggest that the smaller the space or sub-space the lower the probability of hitting the location space.

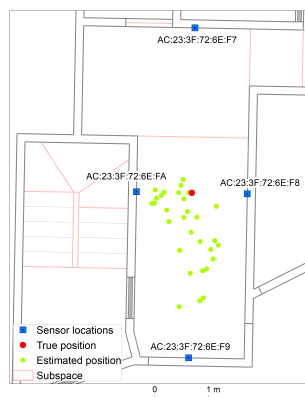

**Figure 7.** Results obtained in scenario one. 2D without obstacles

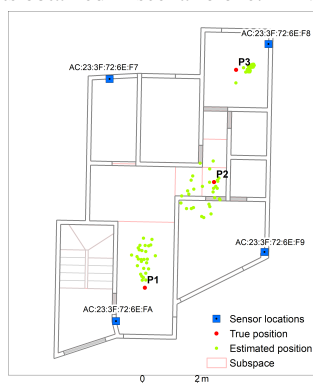

**Figure 8.** Results obtained in the second scenario. 2D with obstacles

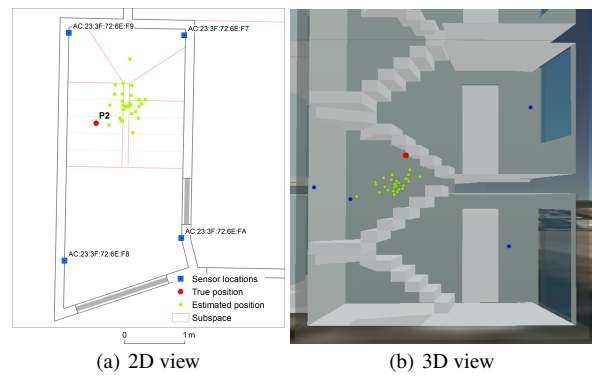

**Figure 9.** Results obtained in the third scenario. 3D with obstacles

### 3.3 Indoor Navigation System

A tangible result of this research is a working prototype of the application which integrates all the components of the navigation system. The operation of the application is illustrated in the video available at the following link [https://youtu.be/LLIySj\\_zKWA](https://youtu.be/LLIySj_zKWA). The evaluation of the prototype focused on measuring the response times of the main functions and their respective REST services. The process consisted of executing each function 20 times, measuring the response time when the function starts until a result is obtained and also measuring the response time of the REST services involved; finally, the mean of the measurements for each test is calculated. All measurements were performed using google Chrome DevTools tool (Chrome Developers, 2022)

Function	Time(ms)
Startup	8423.85
Routing	6357.25
Location in unobstructed spaces	9705.45
Location in spaces with obstacles	16358.44

**Table 5.** Response times of the main functions of the application

The average startup time of the application is 8423.85ms of which approximately 4544.99ms are used for the loading of the CesiumJS library elements. Additionally, it is detected that in an unobstructed space the signal detection and weighted location calculation is approximately 3400.65ms while in an obstructed space the time increases to 10082.16ms. In the above two scenarios the process involved in requesting the REST services and displaying the results both audio and visually takes approximately 6.2s. In conclusion, having the BLE devices in a space with direct visual with the mobile device offer better performance in terms of response time than a system with the BLE devices distributed in a way that there are obstacles with the mobile device.

## 4. DISCUSSION

Regarding the functionality of the IndoorGML and CityGML models in an indoor navigation system oriented to visually impaired users, we can state that those standards are relevant and complement each other for this study case. It was possible to determine from the IndoorGML model, the shortest route between different points of the building, no matter their location inside the building; on the other hand, the CityGML model made possible to search for routes based on the name of the

spaces as well as provides context information of the user's location space, such as its physical characteristics; this information is especially useful for visually impaired users because it helps them to notice possible obstacles. Further work is needed to assess the relevance of the created models to determine the ideal route according to the preferences and particular conditions of each user.

Regarding the positioning technique, in previous researches using the WPL algorithm in a two-dimensional space  $(x, y)$ , with RFID technology obtained an average error of  $1.651m$  (Zou et al., 2013a), with WiFi technology (Poulose and Han, 2019) obtained an RMSE of  $1.7m$ . We obtained an RMSE of  $0.88m$  in a two-dimensional scenario  $(x, y)$  with obstacles. Another aspect to note is that in previous researches the WPL algorithm had been used in a two-dimensional  $(x, y)$  (Zou et al., 2013b, Zou et al., 2013a, Poulose and Han, 2019) space while in this research it is implemented in a three-dimensional  $(x, y, z)$  space achieving a RMSE of  $1.06m$  in a space with obstacles. The above comparison suggests that using the WPL algorithm together with the BLE technology yields better results. However, we obtained better results by the fusion of the WPL algorithm with the extreme learning machine (ELM) algorithm with an average accuracy of  $0.799m$  (Zou et al., 2013a). (Mahida et al., 2017) suggest that to carry out an ideal indoor navigation, an accuracy of less than  $2m$  is required; our results comply with this premise, however, it could also be evidenced that for small spaces such as corridors and stairs an approximate accuracy of  $0.5m$  is required to signal the correct location space to the users.

The above mentioned opens two approaches for further research: 1) by considering the three dimensions  $(x, y, z)$  for model building, data processing and visualization of the results, so that the system behavior in stairs is evaluated opening a door for the exploitation of user location between floors and during floor transitions, which is a necessity as stated by (Murata et al., 2019). 2) combining the WPL algorithm with other algorithms to improve the precision and accuracy location of the user.

The proposed navigation system is designed to provide the user's location in real time, or in the shortest possible time. In the tests performed, the user's location is obtained in  $9.7s$  on average, considering a space with direct visual between the BLE devices and the mobile device. Although the times are acceptable, in a navigation system oriented to people with disabilities the location estimation should be provided milliseconds in advance to notify of changes in space especially when the user is on the move (Murata et al., 2019), this is an aspect that should be improved of our current implementation. On the other hand, the effectiveness of the system should be evaluated by the end users, since omission of relevant aspects is possible; so far, only the aspects mentioned in previous studies have been emphasized.

## 5. CONCLUSION

In this research we propose an indoor navigation system aimed for people with disabilities. The proposal integrates CityGML and IndoorGML standards as the basic data providers for context information delivery and route planning, with user positioning based on BLE technology by a weighted path loss algorithm - WPL and a user interface that allows the user to interact with the system. From the work developed we obtained the following conclusions:

- The IndoorGML model supports the entire topological structure of the navigation network for routing, however, as it does not provide context information, it is necessary to integrate the CityGML model, not only as a visualization model but also as a supplier of context information.
- From the integration of BLE technology and the positioning technique, a position accuracy of  $1.02m$  is achieved in a scanner without obstacles, an average error of  $0.86m$   $1.06m$  for a 3D scenario with obstacles. Although the results are better than those achieved in other investigations, they do not allow the correct location the user in small size spaces such as stairs or corridors.
- From this research it could prove that it is possible to build a navigation system based on an architecture consisting of four basic components. (1) A network of sensors that emit the RSSI signal every  $100ms$ . (2) A database created in Postgresql which stores part of the CityGML and IndoorGML model classes from which the optimal route is queried and context information is provided. (3) An Android app that is responsible for calculating the location of the device from the received RSSI signal, receiving the user's instructions, visualising the results in a 3D interface by means of the CesiumJS library and informing the user's position and the characteristics of the location space by means of audios, an aspect mainly beneficial for visually impaired people. (4) A web server that allows communication between the application and the database.

## REFERENCES

- Afyouni, I., Ray, C., Claramunt, C., 2012. Spatial models for context-aware indoor navigation systems: A survey. *Journal of Spatial Information Science*, 4(4), 85–123.
- Alattas, A., Zlatanova, S., Oosterom, P. V., Chatzinikolaou, E., Lemmen, C., Li, K. J., 2017. Supporting indoor navigation using access rights to spaces based on combined use of IndoorGML and LADM models. *ISPRS International Journal of Geo-Information*.
- Amazon Web Services, Inc., 2022. Amazon ec2.
- Buyukdemircioglu, M., Kocaman, S., 2020. Reconstruction and Efficient Visualization of Heterogeneous 3D City Models. *Remote Sensing*, 12(13), 2128.
- Cesium GS, Inc, 2022a. CESIUM ion. Accessed: 2022-05-14.
- Cesium GS, Inc, 2022b. CesiumJS - Geospatial 3D Mapping and Virtual Globe Platform. Accessed: 2022-05-14.
- Chrome Developers, 2022. Chrome devtools.
- Coleman, D., 2014. Bluetooth Low Energy (BLE) Central plugin for Apache Cordova.
- Coret Gorgonio, F. J., Pérez Bou, J., Alcantud Marín, F., 2015. Sistemas de orientación en el interior edificios de concurrencia pública. Prototipo ISMO. *V Congreso Internacional de Turismo para Todos + VI Congreso Internacional de Diseño, Redes de Investigación y Tecnología para todos DRT4ALL, 2015*, 313–339.
- Dijkstra, E. W., 1959. A note on two problems in connexion with graphs. *Numerische Mathematik*.
- Esri, 2022. Resources for arcmap.

- Huh, J.-H., Seo, K., 2017. An Indoor Location-Based Control System Using Bluetooth Beacons for IoT Systems. *Sensors* 2017, Vol. 17, Page 2917, 17, 2917.
- Isikdag, U., Zlatanova, S., Underwood, J., 2013. A BIM-Oriented Model for supporting indoor navigation requirements. *Computers, Environment and Urban Systems*, 41, 112–123.
- ISO, 2011. ISO/IEC/IEEE 42010:2011. Systems and software engineering — Architecture description.
- Kim, J. S., Yoo, S. J., Li, K. J., 2014. Integrating IndoorGML and CityGML for indoor space. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, 8470 LNCS, Springer Verlag, 184–196.
- Kontarinis, A., Zeitouni, K., Marinica, C., Vodislav, D., Kotzinos, D., 2019. Towards a semantic indoor trajectory model. *CEUR Workshop Proceedings*.
- Li, K. J., 2008. Indoor space: A new notion of space. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*.
- Mahida, P. T., Shahrestani, S., Cheung, H., 2017. Localization techniques in indoor navigation system for visually impaired people. *2017 17th International Symposium on Communications and Information Technologies (ISCIT)*, 2018-January, IEEE, 1–6.
- Martinez-Sala, A. S., Losilla, F., Sánchez-Aarnoutse, J. C., García-Haro, J., 2015. Design, implementation and evaluation of an indoor navigation system for visually impaired people. *Sensors (Switzerland)*.
- Miao, M., Spindler, M., Weber, G., 2011. Requirements of indoor navigation system from blind users. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, 7058 LNCS, Springer, Berlin, Heidelberg, 673–679.
- Minew, 2021. E2 Max Beacon - Minew.
- Montilla, Y. M., León-Sánchez, C., 2020. 3D MODELING OF A BUILDING ORIENTED TO INDOOR NAVIGATION SYSTEM FOR USERS WITH DIFFERENT MOBILITY CONDITIONS. *ISPRS Annals of Photogrammetry, Remote Sensing and Spatial Information Sciences*.
- Murata, M., Ahmetovic, D., Sato, D., Takagi, H., Kitani, K. M., Asakawa, C., 2019. Smartphone-based localization for blind navigation in building-scale indoor environments. *Pervasive and Mobile Computing*, 57, 14-32.
- Naghdi, S., O’Keefe, K., 2019. Trilateration with ble rssi accounting for pathloss due to human obstacles. *IEEE*, 1–8.
- Nakajima, M., Haruyama, S., 2013. New indoor navigation system for visually impaired people using visible light communication. *Eurasip Journal on Wireless Communications and Networking*, 2013(1), 1–10.
- Nginx, 2021. nginx. <https://nginx.org/> accessed: 2021-04-18.
- OGC, 2014. *OGC® IndoorGML*. Open Geospatial Consortium. Version: 1.0.0.
- Park, S., Yu, K., Kim, J., 2020. Data Model for IndoorGML Extension to Support Indoor Navigation of People with Mobility Disabilities. *ISPRS International Journal of Geo-Information*, 9(2), 66.
- Pérez-Navarro, A., Torres-Sospedra, J., Montoliu, R., Conesa, J., Berkvens, R., Caso, G., Costa, C., Dorigatti, N., Hernández, N., Knauth, S., Lohan, E. S., Machaj, J., Moreira, A., Wilk, P., 2018. Challenges of Fingerprinting in Indoor Positioning and Navigation. *Geographical and Fingerprinting Data to Create Systems for Indoor Positioning and Indoor/Outdoor Navigation*, Academic Press, 1–20.
- Poulose, A., Han, D. S., 2019. Indoor Localization using PDR with Wi-Fi Weighted Path Loss Algorithm. *ICTC 2019 - 10th International Conference on ICT Convergence: ICT Convergence Leading the Autonomous Future*, 689-693.
- Simões, W. C., Machado, G. S., Sales, A. M., de Lucena, M. M., Jazdi, N., de Lucena, V. F., 2020. A review of technologies and techniques for indoor navigation systems for the visually impaired.
- The Apache Software Foundation, 2016. Architectural overview of Cordova platform - Apache Cordova.
- Timpf, S., Volta, G. S., Pollock, D. W., Egenhofer, M. J., 1992. A conceptual model of wayfinding using multiple levels of abstraction. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*.
- Wirola, L., Laine, T. A., Syrjärinne, J., 2010. Mass-market requirements for indoor positioning and indoor navigation. *2010 International Conference on Indoor Positioning and Indoor Navigation, IPIN 2010 - Conference Proceedings*.
- Wong, M. O., Lee, S., 2019. A Technical Review on Developing BIM-Oriented Indoor Route Planning. *Computing in Civil Engineering 2019: Visualization, Information Modeling, and Simulation - Selected Papers from the ASCE International Conference on Computing in Civil Engineering 2019*.
- Yan, J., Diakité, A. A., Zlatanova, S., Aleksandrov, M., 2019. Top-bounded spaces formed by the built environment for navigation systems. *ISPRS International Journal of Geo-Information*.
- Yang, B., Guo, L., Guo, R., Zhao, M., Zhao, T., 2020. A Novel Trilateration Algorithm for RSSI-Based Indoor Localization. *IEEE Sensors Journal*, 20, 8164-8172.
- Zafari, F., Gkelias, A., Leung, K. K., 2019. A Survey of Indoor Localization Systems and Technologies. *IEEE Communications Surveys and Tutorials*.
- Zou, H., Wang, H., Xie, L., Jia, Q.-S., 2013a. An rfid indoor positioning system by using weighted path loss and extreme learning machine. *2013 IEEE 1st International Conference on Cyber-Physical Systems, Networks, and Applications (CPSNA)*, IEEE, 66–71.
- Zou, H., Xie, L., Jia, Q.-S., Wang, H., 2013b. An integrative weighted path loss and extreme learning machine approach to rfid based indoor positioning. *International Conference on Indoor Positioning and Indoor Navigation*, IEEE, 1–5.